

HACH BIOTECTOR B3500c Online TOC Analyser



Applications

- ▶ Industrial Condensate
- ▶ Cooling water
- ▶ Boiler water
- ▶ Drinking Water

Maximum uptime and reliability for TOC analysis in clean water applications

Through its patented technology and semi-annual reagent replacement, the HACH BIOTECTOR B3500c delivers 99.8% uptime with the lowest operating cost in condensate monitoring, drinking water, and other clean water applications.

Worry-free TOC

With patented two stage, advanced oxidation technology, the B3500c provides you with maximum reliability and uptime, without sacrificing accuracy.

Lowest cost of ownership

Simply replenish reagents, replace the sample pump tube, and calibrate twice a year.

Small footprint = critical wall space savings

With one of the most compact analyser footprints, this analyser frees up wall space for other needed instruments.

Reagent costs that don't kill the bottom line

A six month reagent replacement cycle results in direct bottom line savings in comparison to other systems requiring bi-weekly or monthly replacement.

One instrument for multiple streams

Providing the ability to monitor two streams at the same time, eliminates the double-cost of needing two separate analysers.

HACH BIOTECTOR B3500c Online TOC Analyser

Technical data*

Ambient temperature	5 - 40 °C (41 to 104 °F)	Measurement method	Infrared Measurement of CO ₂ after Oxidation
Permissible Chloride range	Up to 30 %	Measuring range	0 - 25 mg/L C, with exceedance tracking up to 100 mg/L C
Communication: digital	Modbus, PROFIBUS, Ethernet Modbus is a registered trademark of Gould Inc.	Multi-Stream	Up to 2 process streams and grab sample
Cycle Time	Typically 5 minutes 30 seconds	Oxidation Method	Patented Two-Stage Advanced Oxidation Process (TSAO) using Hydroxyl Radicals
Parameter	Measures TOC, TIC, TC, and VOC	Particle size	Up to 100 µm
Data Storage	Previous 9999 reaction data Previous 99 fault events	Power requirements (Voltage)	115/220 V AC
Dimensions Metric (H x W X D)	750 mm x 500 mm x 320 mm	Range Selection	Automatic or manual range selection
Display	High contrast 40 character x 16 line backlit LCD with LED backlight	Repeatability	± 3 % of reading or ± 0.03 mg/L (30 ppb), whichever is greater
EExp / Hazardous Location	Certification options are available to North American Standards (Class 1, Div 2) and EU Standards (ATEX)	Sample inlet temperature	0 - 60 °C (32 to 140 °F)
Exceedance Tracking	Full exceedance tracking up to 100 mg/L C	Service interval	6 months service intervals
Humidity	5 - 85 % (non-condensing)	User Interface Description	Microcontroller with membrane keyboard
Languages user interface	English, Spanish, French Others available upon request	Weight	46 kg

*Subject to change without notice.

Principle of operation

TIC

Acid is added to lower the pH so that inorganic carbon is sparged off as CO₂. This is measured to ensure Total Inorganic Carbon (TIC) is not carried over into the TOC.

Oxidation

BIOTECTOR's patented oxidation method (TSAO) achieves total and complete oxidation of the sample, including organic carbon to CO₂. TSAO utilises hydroxyl radicals generated within the analyser by combining oxygen, which passes through the ozone generator, with sodium hydroxide.

TOC


To remove CO₂ from the oxidised sample, the pH of the sample is lowered again. The CO₂ is sparged and measured by the specially developed NDIR CO₂ analyser. The result is displayed as Total Organic Carbon (TOC).




HACH BIOTECTOR B3500c Online TOC Analyser

Dimensions


Front View

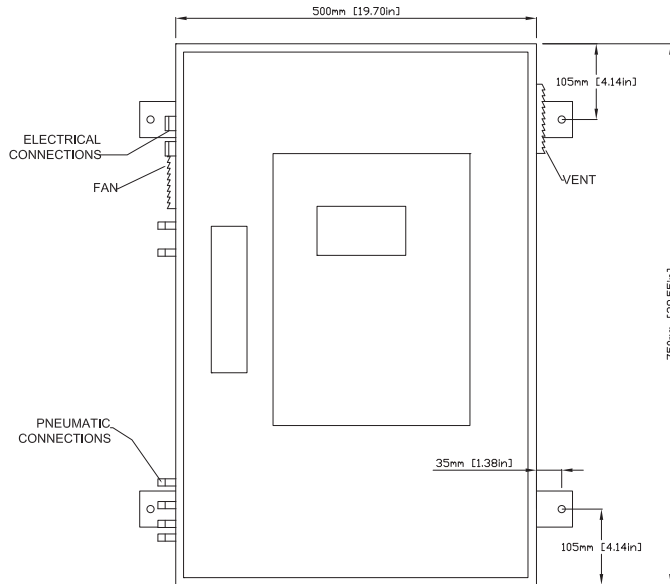


Side View

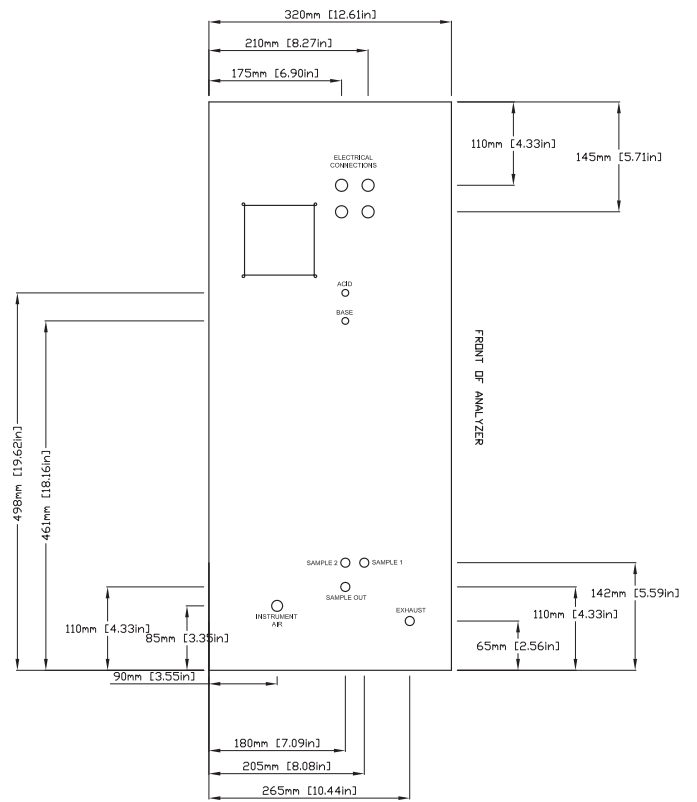

Top View

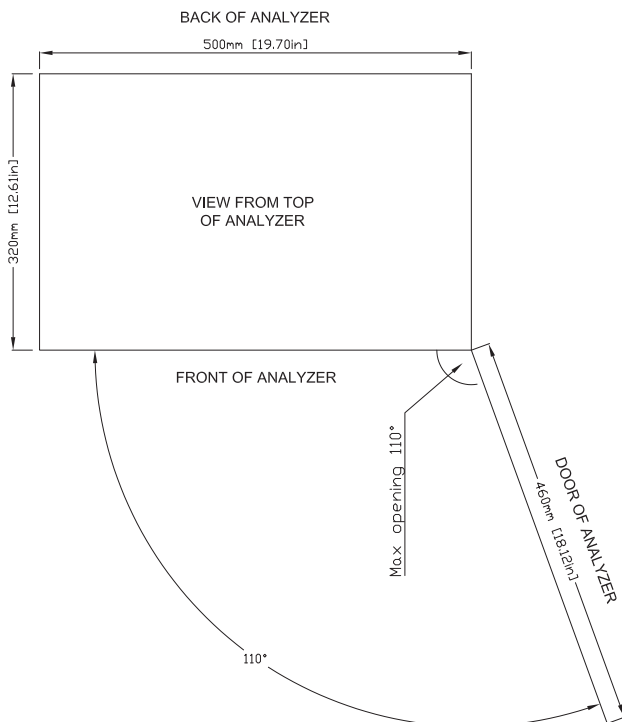

Panel Detail

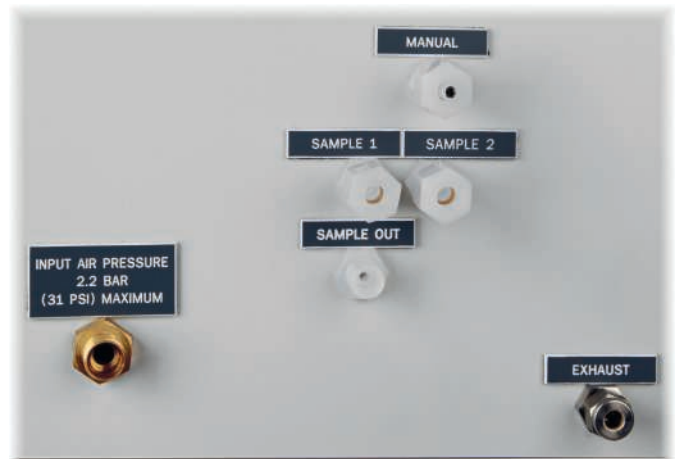

HACH BIOTECTOR B3500c Online TOC Analyser

Order information

Instruments

B5BCAA199AAC2	HACH BIOTECTOR B3500c Online TOC analyser, 0 - 25 mg/L C, 1 stream, manual valve, 230 VAC
B5BFAA199AAC2	HACH BIOTECTOR B3500c Online TOC analyser, 0 - 100 mg/L C, 1 stream, manual valve, 230 VAC
B5BCAA199CAC2	HACH BIOTECTOR B3500c Online TOC analyser, 0 - 25 mg/L C, 1 stream, manual valve, ATEX, 230 VAC
B5BFAA199CAC2	HACH BIOTECTOR B3500c Online TOC analyser, 0 - 100 mg/L C, 1 stream, manual valve, ATEX, 230 VAC

There are additional options available. Please contact HACH LANGE for more details.

Accessories

10-SMC-001	BIOTECTOR B3500 Air supply filter pack
2038062	BIOTECTOR Reagent 4.0 N NaOH
2038162	BIOTECTOR Reagent, 6.0 N sulfuric acid w/Mn catalyst
19-KIT-123	Six months spare part kit for BIOTECTOR B3500